


- NOTES:
1. FOLLOW DISCONNECT SWITCH 100893 INSTALLATION INSTRUCTIONS.
 2. REFER TO ATS MODEL 101380 MANUAL FOR LOAD, COMMUNICATION, AND LCM WIRING INSTRUCTIONS.
 3. ALL LOCAL CODES MUST BE FOLLOWED.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CHAMPION ENGINE TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CHAMPION ENGINE TECHNOLOGY IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: SEE 3D MODEL FOR UNSPECIFIED GEOMETRY DIMENSIONS ARE IN MILLIMETERS LINEAR: ± 0.3 HOLE: $+0.3/-0$ ANGULAR: MACH $\pm 0.5^\circ$ BEND $\pm 1^\circ$ SURFACE FINISH-MACHINED: 3.2Ra THREADS: 6H/6g COAXIAL FEATURES: $\varnothing 0.3$ TRUE POSITION INTERPRET GEOMETRIC TOLERANCING PER: ISO 1101 : 2012 MATERIAL FINISH	NAME	DATE
	MODELED BY	
	DRAWN BY CET LAJ	1/8/2020
	CHECKED BY	
	ENG. APPROVAL COMMENTS:	

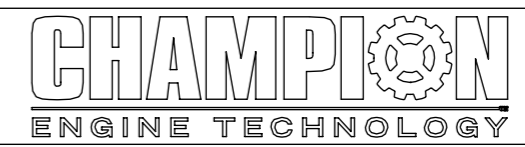

TITLE: SCHEMATIC, DISCONNECT SWITCH TO RELIANCE ATS		
SIZE A3	DWG. NO. 102605	REV
SCALE: 1:1	DO NOT SCALE DRAWING	WEIGHT: g
		SHEET 1 OF 1

